

DUROFIX™
Series
RV2056-WR I

ONE-STEP FASTENING WITH PRECISE TORQUE CONTROL

IMPROVE WORK EFFICIENCY RIGHT AWAY

**1 AUTO SHUT-OFF
AT SET TARGET TORQUE**

For easily dealing with any tightening works of M3 to M10 bolt/screw with guaranteed tightening precision at CMK > 1.67 +/- 10% to achieve truly industrial grade assembling standard

2 EASY TO SET UP & OPERATE

Using the OLED screen & intuitive key system, you can quickly set target torque values and related operating parameters.

INSTANT TORQUE DISPLAY

Showing actual achieved torque or angle value and batch count

**3 OK / NG
STATUS INDICATION**

by color lighting and screen displaying




**4 ERGONOMIC HAND GRIP
WITH LIGHT & COMPACT DESIGN**

under 1.5kgs/3.3lbs in battery-attached weight with 206mm / 8.11inch in tool length offers less fatigue for long-time operation



Affordable

These tools are competitively priced like other pneumatic clutch tools, making a simple replacement easy without breaking the bank.

Productive

8 easy to toggle programs can replace man tools in one station and each program controls; speed, torque and angle. This gives endless possibilities but often is used to run longer fasteners at a fast rpm, then slow down last second to ensure we do not overshoot torque on smaller hardware.

Durable

Having a DC Motor, this tool has proven to have greatly reduced maintained compared to pneumatic clutch tools and other battery clutch style tools.

Quality Control

Having a transducer that provides live end of run torque data, you never worry if you mis torqued a fastener again. The end of run data also can be transferred to an excel sheet or MES system via cable or Wifi (Open Protocol)

Model	Drive	Torque Range	Programmable Speed
RV2056-WR8	1/4" Hex Shank	1-8 Nm/0.7-5.9 ft-lbs	50-1,200 rpm
RV2056-WR18	1/4" Hex Shank	3-18 Nm/2.2-13.3 ft-lbs	50-800 rpm
RV2056-WR24	1/4" Hex Shank	6-24 Nm/4.4-17.8 ft-lbs	50-600 rpm
RV2056-3-WR18	3/8" Square	3-18 Nm/2.2-13.3 ft-lbs	50-800 rpm
RV2056-3-WR24	3/8" Square	6-24 Nm/4.4-17.8 ft-lbs	50-600 rpm

Office Locations: 21100 W. Capitol Drive, Suite 6. Brookfield, WI 53072 and 430 South Spresser St. Taylorville, IL 62545

Office: 262-798-0535

Email: sales@aejh.net

Fax: 262-798-7928

Torque Control Assembly

Reactionless High Torque Pulse Tools



Clutch Nut Runners and Screwdrivers




High Torque Nut runners



Click and Gyroscope Hand Tools



Torque Audit Equipment

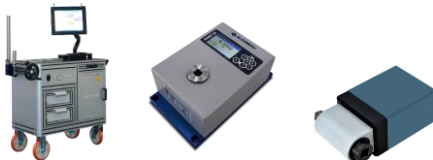

Hammering and Pressing

Hammer Elimination Solutions



Air, Hydraulic & Servo Presses



Riveting

Blind and Huck Bolt Rivet Tools



Rivnut Tools




Hollow and Buck Rivet Tools



Ergo-Split Handle Rivet Tools



High Production Hydraulic Riveters

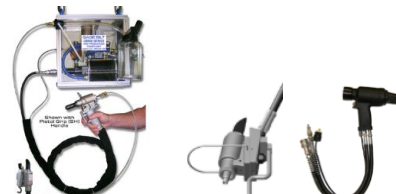

Material Handling and Tool Support Systems

Screw / Rivet Feeders & Presenters



Zero Gravity and Torque Arms



Benches and Work Stations



Lifting Devices, Custom Lifting



Office Locations: 21100 W. Capitol Drive, Suite 6. Brookfield, WI 53072 and 430 South Spresser St. Taylorville, IL 62545

Office: 262-798-0535

Email: sales@aeHH.net

Fax: 262-798-7928